Forest City 1 — Future Proof Technology Working Group

Phase 1 Report

Author: Rob Pickering (rob@pickering.org)

Summary

This report presents the Phase 1 output of the Forest City (FC) Future Proof Technology Working Group. It provides an initial technical analysis of how emerging technologies may influence the long-term design and infrastructure requirements of a new city of one million residents.

The analysis presented here should be understood as work in progress. The detailed modelling, engineering design and financial analysis required to fully substantiate these conclusions will take place in later phases of the programme. However, several technology trends are already sufficiently clear to justify incorporating them into early masterplanning decisions.

In particular, choices made during the initial design of the city—such as the allocation of infrastructure corridors, plant space, utility routes, communications ducting and data governance frameworks—are extremely difficult and expensive to change once construction begins. The purpose of this report is therefore to identify areas where early decisions can preserve long-term flexibility or unlock future technological opportunities.

The report focuses specifically on technologies that could materially influence the physical structure and infrastructure systems of the city, rather than short-lived product or platform choices.

The analysis presented here draws on discussions within the technology working group together with independent technical research and drafting undertaken during Phase 1 of the programme. The sections that follow summarise the current state of this work and identify low-regret provisions that can be incorporated into early planning while more detailed technical work continues.

There are five sections in all and the findings are summarised here:

- **Section 1 — Energy:** Peak electrical demand is estimated at approximately **460 MVA**, exceeding the capacity of the nearest Grid Supply Point. An integrated approach combining grid connections, distributed storage, district heating from data centre waste heat, and geothermal energy is recommended.
- **Section 2 — Building technology:** The scale and duration of the programme necessitate construction methods beyond conventional UK approaches. Industrialised construction, engineered timber, automation, and digital verification each present viable pathways. The recommended course of action is to design in enabling conditions—logistics staging, heavy transport access, and digital handover standards—rather than to prescribe a single method.
- **Section 3 — Data networking:** FC's proximity to major international and regional fibre routes presents an opportunity to establish communications infrastructure as permanent civic infrastructure. A distributed architecture of district connectivity centres linked by high-capacity fibre rings could support carrier-neutral access, distributed data centres, and terabit-scale local exchange capacity. An early decision on the ownership and governance model for fibre infrastructure is required.
- **Section 4 — Digital twins and the Open Source City:** The digital twin should serve as the programme's authoritative record of spatial truth across the full project lifecycle. An early decision is required on whether to adopt a single platform or a standards-led federation, with open interoperable deliverables mandated in either case. The Open Source City ambition should be

anchored in publishable data layers, defined schemas, and governance distinguishing open civic data from protected operational information.
- **Section 5 — Federated smart home technology:** Forest City should not seek to develop federated smart home platforms directly. The recommended approach is to establish enabling conditions: open city-level interfaces for energy signals, physical sensor readiness in the built environment, and interoperability-focused procurement. Privacy, consent, and cybersecurity should be treated as design inputs from the outset.

Introduction

Why this report exists

Forest City 1 is an unusually ambitious proposition: a new city built at scale and at speed, intended to remain permanently affordable while being genuinely beautiful and environmentally restorative.

The Future Proof Technology Working Group exists because the project's built-environment decisions will be made in the near term, but the city must continue to work well for decades. If we optimise only for "today's" technologies, we risk repeating familiar failures of long-lived infrastructure—where retrofitting becomes disruptive, expensive, or simply impossible at the scale a city demands.

Our Phase 1 task is therefore to identify a small set of technology shifts that it would be an oversight **not** to plan for as Forest City moves into later phases (detailed business case and masterplanning). The focus is on technology that changes assumptions, constraints, and required provisions, not on selecting products.

The scope and intent

This report is not a catalogue of gadgets, nor a prescriptive manual instructing domain specialists how to do their jobs. It is a future-facing risk-and-opportunity scan designed to help other working groups make robust decisions under uncertainty.

Specifically, we aim to:

- Make broad technology predictions that inform the way we build the city.
- Identify wildcard technologies that may plausibly emerge during the build-out and materially change cost, speed, labour availability, carbon performance, resilience, or quality of life.
- Translate those possibilities into practical "design-in now" requirements so future adoption is cheap and non-disruptive.
- Provide a transparent logic for prioritisation so that we can scrutinise, challenge, and improve it throughout the build process.

How this group interacts with other specialisations

The Future Proof Technology Working Group is cross-domain. Our role is enabling and challenging. We support functional areas by:

- Highlighting developing technology-driven constraints and opportunities that alter planning assumptions.
- Identifying "design-in now" provisions that protect optionality.
- Recommending early standardisation approaches to avoid lock-in and enable competitive ecosystems.

We do not attempt to substitute for energy engineers, architects, transport planners, water specialists, environmental scientists, policy leads, or finance modellers. Instead, we aim to give those experts a shared

forward-looking set of assumptions and practical provisions so that masterplanning remains robust under multiple plausible futures.

Principles used throughout this report

- Evidence-led: separate "known", "likely", and "speculative".
- Time-to-impact: consider when a technology intersects the build/occupation timeline.
- Option value: prioritise things cheap to design-in now but expensive to retrofit later.
- Neutrality and interoperability: prefer open interfaces and standards over vendor lock-in.
- City-scale realism: focus on what can operate and be maintained at million-person scale.
- Resilience by default: design systems that fail safely and degrade gracefully.

How to read this report

Sections are organised into five technology domains most likely to influence masterplanning. Each section ends with:

- What to design-in now (physical and digital)
- What to standardise early (interfaces, data, governance)
- Wildcard watchlist (what to track, and triggers)
- Risks and mitigations (including second-order effects)

Keeping it current

Technology is never static; this report will never be "finished". A process within Forest City will be developed to define:

- Update cadence (at Phase gates; then ongoing)
- Incorporating critique (including red-team challenge and external review)
- Where the living version is maintained and how changes are governed

Methodology and selection criteria

This report combines structured horizon scanning with practical city-making constraints. Inputs include expert interviews, a literature scan, comparable project references, and adversarial review where available.

Each technology (or technology cluster) is assessed against a simple rubric:

- Potential impact on city form, capex, and opex
- Likelihood of maturation during the build-out
- Retrofit pain if ignored
- Standards readiness and interoperability potential
- Safety, resilience, and governance implications

---

1. Energy

Electricity supply architecture

A city of one million residents will require electricity infrastructure at a scale rarely seen in recent UK developments. Preliminary modelling undertaken by the working group suggests a peak electrical demand on the order of **~460 MVA** if the city is fully electrified across heating, transport and buildings. This may prove

conservative once the electrical demands of the transport system and any heavy commercial users (e.g. data centres) are fully modelled.

This figure should be treated as a **ballpark peak demand requirement**, but it provides a useful basis for evaluating the scale of infrastructure that may ultimately be required.

Two broad electricity supply architectures are currently being considered.

Grid-supplied electricity model

In the conventional model, the city would rely primarily on the national transmission system for electricity supply.

Electricity would be delivered via **Grid Supply Points (GSPs)**—the substations where electricity from the national transmission network is transferred to regional distribution networks.

Initial investigations suggest that the **nearest primary GSP at Burwell** is already close to full capacity.[1] As a result, it is unlikely that a development on the scale of Forest City could rely solely on this infrastructure.

In practice, the **National Energy System Operator (NESO)** may require that the city connects to **multiple GSPs**, both to provide sufficient capacity and to ensure system resilience. This could imply the construction of **new high-capacity transmission connections and potentially a second GSP-scale connection** serving the development.

Although a number of solar farms exist in the surrounding region, these installations cannot materially reduce the size of grid infrastructure that must be constructed. Transmission systems must be sized assuming **non-production from intermittent sources**, meaning the city must be capable of importing its full peak demand from the grid when renewable generation is unavailable.

Using conventional planning assumptions, providing electricity infrastructure at this scale could involve **capital expenditure in the region of £2.4 billion to £2.8 billion**, depending on the final connection architecture and delivery model.[2][3]

Load smoothing and distributed storage

One important factor that could significantly influence the final infrastructure requirement is the **ability to smooth peak demand**. The headline **~460 MVA peak demand** reflects a conventional planning assumption in which buildings draw power from the grid in real time with limited buffering, storage or local generation capacity. However, emerging storage technologies and local generation (primarily solar) make it increasingly possible to shift and smooth electrical demand over time.

Modern **$LiFePO_4$ (lithium iron phosphate) battery systems** are sufficiently safe and cost-effective to be deployed at domestic scale. A battery pack roughly the size of a household refrigerator can store enough energy to supply a typical property for at least **24 hours of normal operation**, depending on system efficiency and heating configuration and whether other primary heat sources besides electricity are used (see below).[4]

If large numbers of properties within the city were equipped with such storage, with or without local micro generation, and if these systems were orchestrated collectively, the city could effectively operate a **distributed battery fleet**.

Such an approach could allow:

- local buffering of electricity demand
- smoothing of short-term peaks

- coordinated charging during low-demand periods
- reduced peak import requirements from the national grid

If these technologies are deployed at scale, the **effective peak demand seen by the grid could be substantially lower than the raw demand of the city itself**. In that scenario the grid connections and upstream infrastructure required to support the city may be **materially smaller—and therefore less costly—than conventional planning assumptions suggest**.

Energy-abundance model: SMR or other zero-carbon generation

Much of the near-term UK commercial environment encourages energy minimisation: electricity is expensive, grid upgrades are constrained, and many sensible design choices are about reducing demand and shifting load. That remains a rational default response to the current national energy context.

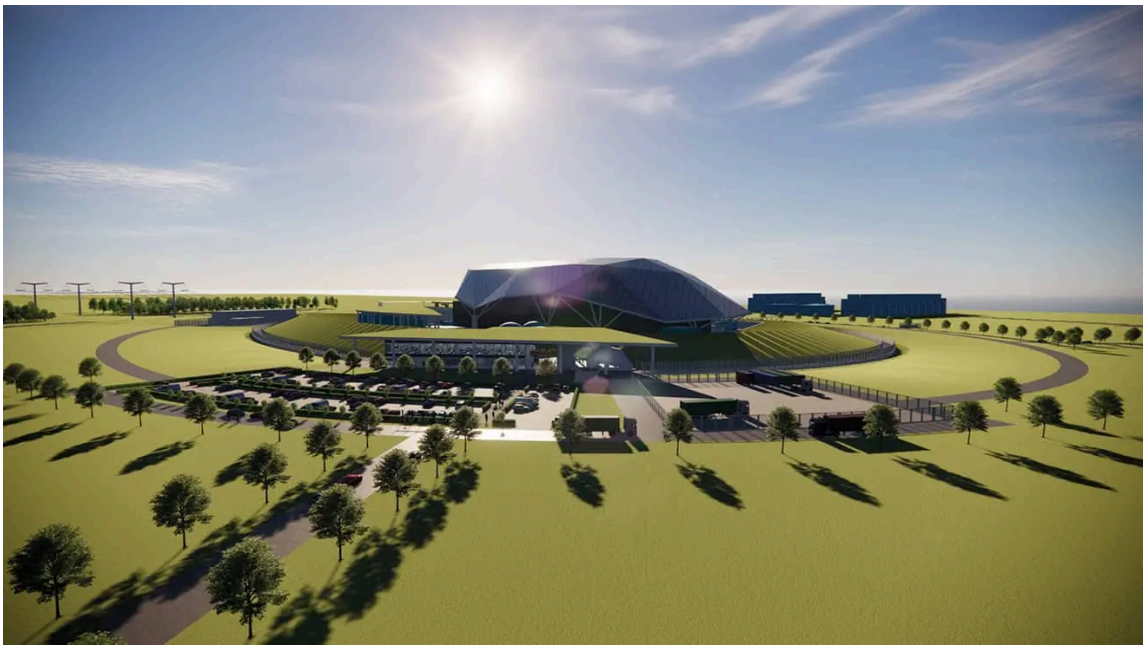

Figure 1. Rolls Royce SMR render (image courtesy of Rolls Royce)

However, one plausible future is the opposite: a world of abundant electricity, driven by a combination of new nuclear (including SMR programmes), grid-scale renewables, storage, and other developments that materially reduce marginal cost and increase supply.[5] In such a scenario, the binding constraint for homes and businesses may move from "energy scarcity" to "how do we take advantage of cheap, plentiful power safely and flexibly?"

If that future materialises, households and local businesses could adopt technologies with far higher electrical demand than current norms—examples might include robotics (potentially including humanoid robots), more intensive local automation, high-capacity charging, and substantially increased local or regional compute footprints. Even if these outcomes arrive unevenly, the retrofit cost of upgrading end-consumer electrical supply and local distribution capacity could be extremely high relative to the modest incremental cost of designing-in headroom during initial construction.

An alternative architecture would treat electricity not as a constrained resource but as a **strategic abundance**. Under this scenario the city could produce a substantial proportion of its electricity locally rather than relying primarily on grid imports.

The implications of this approach could include:

- large-scale electrification of heating and transport
- high-capacity computing and digital infrastructure
- hydrogen production and industrial processes
- long-term energy cost stability

If periods of electricity abundance arise, the city could both become a net exporter and also support **large-scale electrolysis facilities to produce hydrogen**. Electrolysers can act as flexible electrical loads, absorbing surplus electricity and converting it into storable fuel for transport, industry or long-term energy storage.[6][7]

However, the SMR-based architecture is currently treated as a **strategic option rather than a dependency**. The development and its core infrastructure should not rely on the availability of SMR technology, given the regulatory, financing and programme uncertainties currently involved.

End-consumer supply: three-phase, high-current service provision (design-in now)

Forest City should strongly recommend that every end-consumer's premises are provided with **three-phase supply capability** and service equipment/tails sized to **at least 100 amps**, even if initial loads do not require it.[8]

- This recommendation should be framed as optionality rather than immediate necessity.
- The incremental physical cost of installing two additional conductors and appropriately rated service heads during initial construction is expected to be small compared to the cost and disruption of retrofitting later.
- A three-phase baseline also improves flexibility for future electrification and load-balancing, even in an energy-constrained world.

Important caveat: The local Distribution Network Operator (DNO) will ultimately decide network design and service criteria using their standard commercial and engineering processes. The recommendation here is not to override DNO authority, but to ensure Forest City's masterplan, building standards, and developer requirements do not inadvertently lock premises into a low-capacity single-phase future that becomes a long-term constraint.

Local distribution: over-provisioning HV capacity or building for expansion

Forest City should recommend that the physical distribution build is planned around easy expansion, either via:

- Over-provisioned **11 kV and 33 kV** capability (where justified and feasible), and/or
- **Ducting-first construction** that makes additional conductors simple to add later without re-digging.

In practical terms, the guiding principle should be:

- Prefer ducting used exclusively (or as the dominant approach) for distribution routes where future growth is plausible.
- Target low initial utilisation (e.g., designing routes so that early deployments run at ~10–30% of eventual capacity), leaving space for additional conductors and upgrades with minimal disruption.
- Ensure route planning, easements, and access rights anticipate future cable additions, jointing access, and substation expansion.

Data centres, heat recovery and district heating

Large electricity connections also create opportunities to co-locate **high-capacity data centre infrastructure** near the primary grid connections serving the city.

Data centres convert almost all of the electricity they consume into heat. Rather than treating this heat as waste, the city could treat it as a **valuable thermal resource**. Waste heat from data centres could be captured and distributed through **district heating networks**, significantly reducing the energy required to heat buildings across the city.[9][10]

This approach could be strengthened further through the use of **large-scale underground thermal storage**, sometimes referred to as **seasonal thermal batteries**. These systems allow excess heat produced during periods of high data centre activity to be stored underground and recovered later when heating demand increases.

If implemented at sufficient scale, this combination of **data centre heat recovery, district heating and thermal storage** could materially reduce the amount of electricity required to heat the city.

Geothermal energy

Alongside heat recovery, the city may also be able to draw on **geothermal energy systems**. Conventional UK policy has tended to prioritise geothermal development only in locations where natural geothermal "hot spots" exist. However, the area between **Haverhill and Newmarket does not appear to have significant natural geothermal hotspots**, which might traditionally make geothermal development less likely.

This assumption may now need to be reconsidered. The UK possesses extensive deep drilling expertise developed through decades of **North Sea oil and gas exploration**, and advances in hard-rock and deep drilling technologies mean geothermal systems may now be technically feasible in locations that lack natural geothermal reservoirs.[11]

Many modern geothermal designs use **closed-loop systems**, in which fluids circulate through sealed underground pipe networks rather than relying on natural aquifers. These systems significantly reduce environmental risks such as groundwater contamination and can operate without requiring naturally occurring geothermal water reservoirs.

Rough conceptual estimates suggest that **around twenty installations of this scale could theoretically supply the domestic energy needs of a city of one million residents**.

When combined with **district heating networks, underground thermal storage and heat recovery from data centres**, geothermal energy could dramatically reduce the amount of electricity required for heating across the city.

Early infrastructure provisions

Regardless of the final electricity generation strategy, several provisions appear to be **low-regret design choices**:

- reserving land for **large primary substations (14 ha per substation)**
- safeguarding corridors for **high-voltage transmission routes**
- reserving land near grid connections for **energy-intensive infrastructure such as data centres**
- enabling future expansion of grid connections and local generation

These provisions are relatively inexpensive to include during early planning but extremely difficult to retrofit once the city is built.

The technologies discussed in this section should not be viewed as independent options but as components of a **coherent energy system**. Grid imports, local generation, distributed batteries, hydrogen electrolysis,

district heating, thermal storage, geothermal energy and data-centre heat recovery can reinforce one another when designed together. Forest City therefore has an opportunity to treat energy infrastructure as an integrated system rather than a collection of separate utilities, enabling greater resilience, lower long-term costs and increased flexibility as technologies evolve.

2. Building technology

Construction at city scale

Forest City represents an unusually large and sustained construction programme. Delivering housing, civic buildings and infrastructure for a city of one million residents and 8,000 acres of commercial land will require construction methods capable of operating **reliably, quickly and repeatedly over decades**.

Traditional UK construction approaches often struggle with cost predictability, labour availability, build speed and carbon intensity. As a result, it is plausible that the technologies and methods used to construct Forest City may differ significantly from those used in recent UK developments.

This section therefore examines emerging building technologies and construction approaches that could materially affect how the city is delivered, with particular attention to **industrialised construction, engineered timber systems, automation and robotics, and digital quality assurance**.

The objective is not to prescribe a single construction method, but to identify the **enabling conditions Forest City should design into the development** so that multiple construction approaches remain viable.

Industrialised construction

One of the most significant shifts in construction globally is the gradual move toward **industrialised construction**.[12][13]

Instead of constructing most building components on site, industrialised approaches manufacture large parts of buildings in controlled factory environments before transporting them to site for assembly. These approaches include:

- volumetric modular construction
- panelised building systems
- hybrid prefabricated structures combining factory and on-site work

Industrialised construction can offer several advantages at the scale required for Forest City:

- faster build times
- improved quality control
- reduced waste
- more predictable costs
- reduced reliance on scarce on-site labour

However, such approaches impose different logistical and design constraints. Transport limits, crane capacity, staging areas and supply chains become critical elements of the construction system.

For a development of Forest City's scale, the ability to support **high-throughput, factory-supported construction methods** could significantly accelerate delivery while improving build quality.

Engineered timber and hybrid structures

Another technology likely to influence future construction is the increasing use of **engineered timber systems**, particularly cross-laminated timber (CLT) and related products.

Engineered timber offers several potential advantages:

- significantly reduced embodied carbon compared with conventional concrete structures
- rapid assembly using prefabricated structural elements
- high structural strength-to-weight ratios
- opportunities for hybrid structures combining timber, steel and concrete

Many European cities are already seeing mid-rise and high-rise buildings constructed using timber or hybrid structural systems.[14][15] For Forest City, engineered timber could play an important role in reducing the carbon footprint of the development while also supporting faster construction cycles.

Figure 2. School in France built from Cross Laminated Timber

However, widespread use of timber construction may require early coordination with regulators, insurers and supply chains, particularly in relation to fire regulations, acoustic performance and long-term durability.

Automation and robotics in construction

Construction automation is also advancing rapidly. Robotic systems are increasingly being used for tasks such as:

- automated earthworks and site preparation
- robotic bricklaying and block placement
- precision concrete finishing
- automated surveying and inspection

At the same time, **inspection drones and mobile scanning systems** are becoming routine tools for monitoring construction progress and verifying work.

While these technologies are unlikely to eliminate the need for skilled labour, they may significantly improve productivity and consistency over long construction programmes. For a project as large as Forest City, designing sites and logistics systems that can accommodate **robotic equipment and automated construction workflows** could become increasingly valuable.

Digital quality assurance and “scan-as-built” construction

Large developments often suffer from discrepancies between design drawings and what is actually built. Emerging digital construction techniques aim to address this through **routine scanning and verification during construction**, producing accurate digital records of completed work.

These approaches may include:

- routine LiDAR scanning of structures during construction
- automated comparison between design models and scanned reality
- digital handover of verified “as-built” models to building operators

This approach aligns closely with the **digital twin principles described in section 4**, ensuring that the city’s digital model reflects the real built environment as accurately as possible. At city scale, such practices could dramatically reduce long-term maintenance and operational risks.

Local supply chains and advanced fabrication

Another opportunity for a development of Forest City’s scale is the creation of **local manufacturing and fabrication capacity**.

High demand for building components over a sustained period could support regional manufacturing of:

- modular building elements
- engineered timber components
- prefabricated façade systems
- CNC-milled stone and architectural components

Advanced fabrication technologies, including CNC machining and automated milling, increasingly make it possible to produce **high-quality architectural materials at scale while retaining design flexibility**. Encouraging such supply chains could improve economic resilience while reducing transport and construction emissions.

Early infrastructure provisions

As with energy infrastructure, the most important question for Forest City is not which technologies will ultimately dominate, but **what enabling conditions should be designed into the city from the start**. Low-regret provisions that may support a wide range of construction approaches include:

- reserving logistics space for large-scale construction staging
- ensuring road layouts and site access suitable for heavy modular transport
- designing crane access and lifting zones into early masterplans
- establishing standards for **scan-as-built verification and digital handover**
- ensuring building data and models integrate cleanly into the city’s digital twin

These provisions are relatively inexpensive to plan early but difficult to retrofit once large areas of the city have been built.

Construction systems as long-term infrastructure

Construction methods are often treated as temporary decisions affecting only the building phase. However, for a development of Forest City's scale and duration, construction systems themselves become a form of **long-term infrastructure**.

By designing the city to accommodate industrialised construction, automated building processes and advanced fabrication methods, Forest City could significantly improve build speed, reduce costs and lower the carbon footprint of the development.

The objective of this section is therefore not to select a single construction technology, but to ensure that Forest City's design and governance frameworks allow the **most effective construction methods available at any point during the build-out to be deployed efficiently**.

3. Data networking

Connectivity as foundational infrastructure

High-capacity data connectivity is a foundational requirement for a modern city. As economic activity, services and public infrastructure become increasingly digital, the resilience, capacity and openness of the underlying communications infrastructure will have long-term implications for economic development, innovation and civic services.

For a new city built at large scale, it becomes possible to treat communications infrastructure as long-lived civic infrastructure, similar in importance to roads, water systems or electricity networks.

Forest City therefore has an opportunity to design connectivity infrastructure from the outset in a way that prioritises resilience, openness and long-term competition rather than relying on ad-hoc commercial deployments.

Strategic fibre routes through the site

The proposed Forest City footprint benefits from the presence of several significant fibre infrastructure assets in the surrounding area. Most notably, a major transnational fibre route linking London and Amsterdam passes close to the site and is believed to include a possible breakout site within or near the development boundary.[16][17]

This route forms part of the wider European long-haul fibre network and provides extremely high-capacity connectivity between major digital hubs including London, Amsterdam and other European exchange points.

In addition, Cambridge City Council and the University of Cambridge operate fibre ducting extending from Cambridge toward Linton, which runs close to the boundary of the proposed development area.[18][19]

Taken together, these assets mean that **Forest City has the potential to obtain direct dark fibre access toward Cambridge, London and Amsterdam**, providing an unusually strong foundation for digital connectivity.

Connectivity along transport corridors

Major fibre routes are often installed alongside transport infrastructure such as railways, motorways and trunk roads. These corridors provide relatively secure, continuous rights-of-way for long-distance fibre cables.

The proposed development area is located close to several such transport corridors, increasing the likelihood that additional fibre routes will either pass through the site or can be connected to it relatively easily. The presence of multiple routes significantly improves resilience, as fibre networks can be designed so that traffic can automatically reroute if a cable is damaged.

This combination of international trunk fibre, regional fibre routes and transport-corridor connectivity creates an opportunity to design Forest City's data infrastructure with unusually high levels of redundancy and capacity from the outset.[20]

District connectivity centres

Rather than treating connectivity as a purely centralised system, Forest City could adopt a distributed connectivity architecture.

One possible model would be to establish a number of district connectivity centres located throughout the city.[21] These facilities would act as local aggregation points where fibre from buildings, neighbourhoods and mobile networks connects into the wider metropolitan and international fibre network.

Each connectivity centre could include:

- carrier interconnection facilities
- fibre distribution frames
- mobile network backhaul aggregation
- edge computing or micro-data-centre capacity

By interconnecting these facilities using high-capacity fibre routes arranged in a city-wide ring topology, Forest City could achieve extremely high resilience.

If any single fibre segment were cut, traffic could simply be routed around the ring in the opposite direction.

Such an architecture would also allow data centres and digital infrastructure to be distributed across the city rather than concentrated in a single location.

Data centres and digital infrastructure

Strong fibre connectivity naturally creates opportunities for the development of data centre infrastructure.

Modern data centres often seek locations that combine reliable power infrastructure, multiple independent fibre routes and proximity to major digital markets.

Forest City could therefore be an attractive location for data centres serving workloads in Cambridge, London and continental Europe.

As discussed in section 1, co-location of data centres near primary energy infrastructure could also enable large-scale heat recovery, allowing waste heat from computing infrastructure to be captured and used in district heating systems.

The relationship between power infrastructure, fibre connectivity and heat networks therefore represents a potential opportunity for integrated infrastructure planning.

Local exchange fabrics and ultra-low-latency workloads

The presence of high-capacity international fibre routes near the development also creates the possibility of establishing a local internet exchange fabric within Forest City.

This should not be viewed as an attempt to create a new national or international internet exchange comparable to existing hubs such as the London Internet Exchange or the Amsterdam Internet Exchange.[22] Forest City's geographic proximity to London means that the latency advantages of such a facility for conventional internet traffic would likely be limited.

Instead, the primary value of a local exchange would be enabling ultra-high-bandwidth traffic between organisations located within the city itself.

Modern compute workloads increasingly involve large volumes of east-west traffic between distributed compute clusters. Examples include distributed GPU training clusters for machine learning, large-scale simulation and modelling, edge computing and data-processing pipelines, and high-bandwidth research networks.

In many cases these workloads benefit from data-centre-class latency and extremely high throughput between facilities, even when those facilities are located in different buildings.

By establishing a local exchange fabric interconnecting district connectivity centres and data centres within Forest City, organisations could achieve latency characteristics approaching those of intra-data-centre networks while still operating across multiple independent facilities.

With modern optical transport technologies already supporting multiple terabits per second of capacity on a single fibre pair, it is plausible that such a city-scale exchange fabric could operate at aggregate capacities measured in terabits per second, particularly as AI and high-performance computing workloads continue to expand.

Such an architecture would allow companies and research institutions within the city to deploy distributed computing systems spanning multiple sites without requiring that all compute infrastructure be concentrated within a single large data centre.

Ownership and governance models for fibre infrastructure

A key decision for any new city is how the underlying fibre infrastructure should be owned and governed.

Several models are possible.

Carrier-built infrastructure

The most common model in existing developments is to allow telecommunications operators to build their own infrastructure independently.

While this approach requires little initial investment from the city, it often leads to duplicated infrastructure, uneven coverage and reduced competition in areas served by a single provider.

In some cases the first operator to deploy infrastructure can effectively establish a local monopoly, limiting competition and consumer choice.

Municipal fibre networks

Some cities choose to build and operate their own fibre networks, providing services directly to residents and businesses.[23][22]

Municipal fibre networks can ensure universal coverage and competitive pricing, but they require significant operational expertise and ongoing management.

Operating a telecommunications network may not align with the core competencies of a city authority.

Municipal carrier-neutral ducting

An alternative approach is for the city to build and maintain carrier-neutral ducting infrastructure while allowing telecommunications providers to install their own fibre within those ducts.

Under this model the city acts as the owner of the passive infrastructure while private operators compete to deliver services.

This approach can significantly lower the cost of market entry for new providers and helps prevent monopolistic infrastructure ownership.

Dark fibre co-operative models

A further option is to establish a dark fibre co-operative.

Under this model the city sponsors the construction of shared fibre infrastructure that is made available to multiple telecommunications providers on non-discriminatory wholesale terms.

Participating carriers can light the fibre with their own equipment and offer services independently, while the underlying infrastructure remains shared.

This approach can combine strong competition between service providers with efficient use of physical infrastructure and reduced duplication of civil works.

Forest City as a distributed hyperscale campus

Taken together, the connectivity architecture described in this section suggests the possibility of treating Forest City as a distributed hyperscale digital campus.

Rather than concentrating computing infrastructure within a single large data centre complex, the city could support a network of interconnected facilities linked through high-capacity fibre rings and local exchange fabrics.

District connectivity centres, carrier-neutral ducting and multiple independent fibre routes would allow organisations to deploy computing infrastructure across multiple buildings while maintaining extremely high bandwidth and low latency between sites.

In effect, the city itself could function as a large-scale distributed data-centre environment capable of supporting workloads that traditionally require tightly coupled computing infrastructure.

As optical networking technologies continue to advance and terabit-per-second fabrics become commonplace, it becomes increasingly plausible for geographically distributed facilities within a city to operate as part of a single high-performance computing system.

This model could make Forest City particularly attractive to AI research organisations, high-performance computing users and data-intensive industries.

Early infrastructure provisions

As with energy and construction systems, the most important step for Forest City is to ensure that the physical provisions required for high-quality connectivity are included from the outset.

Low-regret provisions include:

- installing extensive carrier-neutral ducting throughout the city[20]
- ensuring all buildings include appropriate fibre entry points and risers[24][25][26]

- reserving locations for district connectivity centres[21]
- protecting routes for long-distance fibre corridors
- enabling easy interconnection with regional and international fibre networks

Once streets, buildings and underground utilities are constructed, retrofitting such infrastructure becomes extremely expensive.

Ensuring that the city's physical design supports high-capacity fibre connectivity from the start is therefore likely to be one of the most valuable long-term digital infrastructure investments Forest City can make.

4. Digital twins and the Open Source City

What this section will cover

This section considers a range of plausible futures in which **digital twin** practices become central to how large developments are designed, delivered, verified, and operated, and where Forest City pursues "open source city" principles through **open data formats, open interfaces, and auditable foundations**.

The core question is not whether Forest City should build a single "master digital twin platform", but what **minimum standards, capture practices, and interoperability requirements** Forest City should set so that:

1. we can quickly generate reliable **baseline** digital twins of the development site
2. we can maintain living digital twins as designs develop and construction progresses
3. data remains usable across multiple disciplines, contractors, and tools without being trapped in proprietary formats
4. openness (where safe) becomes a compounding civic asset rather than a one-off publishing exercise

The section should treat the digital twin as a **chain of custody for spatial truth**: from early feasibility to masterplanning, from design models to construction verification, and from "as-designed" to "as-built" to "as-operated". At city scale, the failure modes are predictable: inconsistent coordinate systems, variable survey quality, incompatible file formats, and brittle handoffs between GIS and BIM. Our objective is to challenge developers to use best-available emerging technology and to define standards throughout the build process that demand **open data interoperability** and **maintained, high-quality digital twins**.

A key theme is that these technologies cross over with standard developer tool choices and incumbent building workflows. Forest City is unlikely to dictate every vendor choice, but it can—and will—challenge developers to adopt best practice by specifying outcomes and standards: **minimum capture quality, open deliverables, and a maintained digital twin through the build process**.

Outline thoughts we will report on

- **Digital twin baseline: "ground truth" as early infrastructure**
  In some plausible futures, the speed and reliability with which the project can establish a baseline digital twin becomes a major determinant of schedule and risk. A high-quality baseline can reduce surprises, shorten design cycles, and improve coordination between disciplines. This includes terrain, vegetation, drainage, constraints, and a defensible model of existing assets—particularly underground unknowns.
- **Digital twin through design: "as-designed" models that remain portable**
  As designs develop, developers will use a mix of BIM tools and workflows. Forest City's interest is that outputs remain interoperable and consistently referenced. This is where "GeoBIM" matters:

bridging building-scale BIM exchange with city/territory-scale geospatial models so that the city's twin does not fracture into parallel truths.[27]

- **Digital twin in construction: "as-built truth" that is measurable and updateable**
  A likely direction of travel is that construction verification increasingly relies on routine scanning and evidence capture, not just manual inspection and drawings. The digital twin becomes a maintained record of what was actually built, with repeatable update cycles, quality metrics, and clear responsibility for handover.
- **A practical focus: quality, formats, and handoffs (GIS ⇄ BIM ⇄ reality capture)**
  At scale, the difficult part is rarely "capturing some data"; it is maintaining quality and ensuring repeatable exchange across organisations and tools. The section should highlight:
  - coordinate reference systems and control networks as non-negotiable foundations
  - survey accuracy classes and metadata requirements (how good is "good"?)
  - versioning and provenance (who captured what, when, how, with what uncertainty)
  - exchange formats that avoid lock-in and enable long-lived reuse

Concrete capture and data themes (keep and expand)

- **LiDAR (airborne + mobile + handheld): terrain mapping, vegetation, and as-built verification**
  LiDAR is likely to remain a primary method for fast capture of topography, structure, and construction progress. The practical issue is less "can we collect LiDAR?" and more "how do we ensure consistent referencing, metadata, and quality so the data is re-usable across the programme?" The section should emphasise that point clouds must be delivered with clear provenance and defined accuracy, and must integrate cleanly into the project's digital twin.[28]
- **Mobile/handheld scanning and emerging "democratised capture"**
  Some futures may see cheap scanning used routinely for progress capture and internal verification. This is promising, but also a quality risk if low-control capture is treated as equivalent to high-integrity baseline surveys. The section should separate "high-integrity truth capture" from "low-friction situational capture", and define where each is acceptable.
- **Ground penetrating radar (GPR): utilities planning, archaeology/geotech risk reduction**
  GPR can reduce uncertainty about what is underground, but only if it is captured, referenced, and stored in a way that can be re-used—especially when combined with known asset records and subsequent as-built updates.[29]
- **Open mapping and GIS: what can be open, what must be protected**
  There is a plausible future where open mapping accelerates planning, innovation, and accountability—yet it must be balanced against security and privacy risks. Regardless of what is public, the internal programme twin should treat underground asset truth and constraints mapping as critical dependencies.
- **Open tooling as an enabler (e.g., QGIS)**
  We should explicitly consider open-source tooling such as QGIS as part of an interoperability strategy—not necessarily as the only tool, but as a practical test of portability. Mandating that key deliverables can be inspected and validated in open tooling is a concrete way to reduce lock-in risk and keep the twin maintainable for decades.[28]

"Open Source City"

Forest City's "open source city" ambition can be made practical (and non-hype) by anchoring it in the digital twin and its surrounding ecosystem.

- **Open data by default where safe**
  The city can publish carefully curated layers (and schemas) that enable a broad ecosystem—researchers, civic technologists, suppliers, startups, residents—without exposing sensitive details.

This includes planning artefacts, environmental baselines, and high-level infrastructure descriptions, with strong security review and redaction norms.

- **Standard machine-readable formats and versioning**
  The value of openness compounds when data is reliably structured and versioned. A core principle should be that anything released publicly (or shared programme-wide) should be reproducible, documented, and maintained as the city evolves—rather than posted once and forgotten.
- **Open interfaces and reference implementations**
  Where Forest City defines city-level interfaces (e.g., data APIs, event streams, access patterns), publishing open specs—and, where sensible, reference implementations—reduces lock-in and increases auditability. This supports competition and long-term maintainability.
- **Governance: openness without naivety**
  "Open" should never mean "everything is public" or "security is optional". The section should explicitly cover licensing, contribution models, responsible disclosure, and the boundary between open civic layers and protected operational/security layers.

How Forest City should respond

It remains an open question whether Forest City should commission and operate a single "end-to-end" digital twin platform as part of the project, or whether the city should rely on a federation of widely used third-party tools and platforms connected by standards. A unified platform could offer strong benefits (consistency, simplified governance, reduced friction in handovers), but it also carries risks (lock-in, procurement complexity, long-term operational burden, and the challenge of keeping pace with a fast-moving vendor landscape).

Regardless of which delivery model ultimately prevails, the later-phase decision is the same: **Forest City should make the digital twin a single source of spatial truth**, and ensure that surveying, design development, construction verification, and handover data can all be ingested into a coherent, maintained twin without bespoke rework.

Forest City should therefore consider the following minimum responses:

1. **Decide early whether to standardise on a single digital twin platform, or a standards-led federation**
   Forest City should explicitly choose an approach rather than allowing multiple incompatible "partial twins" to emerge by default. Two viable models are:
   - **Single platform standardisation:** choose a primary digital twin platform and require that all suppliers deliver in forms that can be ingested and maintained within it.
   - **Federation via open standards:** allow multiple platforms, but require a rigorous set of open deliverables, shared referencing, and a defined "authoritative truth layer" that remains consistent across systems.
     The common failure mode at city scale is not lack of tools, but fragmented, inconsistent models. A deliberate choice early reduces that risk.
2. **Mandate open, interoperable deliverables at each lifecycle stage (even if a single platform is chosen)**
   Even if Forest City standardises on one platform, it should still require exportable open deliverables to avoid long-term dependency and to keep data reusable.[30][31][32][33] In practice, this means requiring baseline surveys, design models, and as-built captures to be delivered in open or widely interoperable forms as a minimum "public truth layer".
3. **Define "digital twin quality" as measurable requirements**
   "We have a digital twin" should be testable. Forest City should define minimum expectations for:
   - coordinate systems and control networks
   - accuracy classes and error bounds

    - metadata completeness (capture method, time, calibration, uncertainty)
    - validation and QA procedures
      This is how Forest City challenges developers constructively: by requiring outcomes that can be audited.

4. **Require a maintained digital twin through construction, not a one-off model**
   Forest City should set expectations that the twin is updated at defined milestones (and potentially on a cadence during heavy construction). The deliverable should be a living record supporting coordination, reducing disputes, and improving handover into operations.
5. **Insist on robust GIS ⇄ BIM handoffs ("GeoBIM")**
   If Forest City does not plan for GIS/BIM integration early, the project risks parallel universes: one city-scale model and one building-scale model that do not align. Forest City should therefore require consistent referencing, clear transformations, and unambiguous ownership of the "authoritative" layers of truth.[27][33]
6. **Use open-source tooling as a compliance test, not an ideology**
   A practical enforcement mechanism is to require that key deliverables can be loaded, inspected, and processed in open tooling (e.g., QGIS for GIS layers and point clouds). This is a check that the programme is not trapped in a single proprietary ecosystem—even if one primary platform is chosen.
7. **Treat underground asset truth as a first-class dependency**
   Given the safety and cost impacts of underground unknowns, Forest City should explicitly incorporate underground asset data quality and integration as part of the twin requirements, and require that underground data is maintained and updated throughout construction as "as-built truth".
8. **Make "open source city" tangible via publishable layers, specs, and governance**
   Forest City should define which layers should be publishable (and when), the standard schemas and versioning expectations, and the governance boundary between open civic data and protected operational/security data. This ensures openness becomes a maintained asset rather than an aspirational label.

Summary recommendation: Forest City should treat the digital twin (and its open ecosystem) as a foundational programme asset and decide early whether to standardise on a single platform or a standards-led federation. In both cases, it should require open deliverables, measurable quality, and a maintained twin through the full build lifecycle—so the city avoids fragmented partial models and retains long-term optionality.

Wildcards to track

- Wider adoption of routine reality capture as a contractual norm (scan-to-verify, not just draw-to-build)
- Increasing convergence of GeoBIM workflows and standards (reducing bespoke GIS/BIM integration)
- Low-cost scanning improvements (useful for progress capture, but with quality pitfalls if misapplied)
- Component-level semantic models that enable richer "as-built" truth (beyond geometry)
- Evolving norms or regulation about public sharing of city-scale twin data (balancing openness and security)

5. Federated Smart Home Technology

What this section will cover

This section explores potential futures in which federated, open smart home technology plays a role in energy coordination, security and resident well-being. We consider scenarios where homes and buildings

coordinate in ways that **could** support improved energy efficiency, demand management, and resident protection. While elements of these systems may mature over the development cycle, the direction, pace, and social acceptability of adoption are uncertain. The emphasis here is therefore on **optionality**: what Forest City should do now to avoid blocking beneficial futures, without assuming any single technical outcome.

Outline thoughts we will report on

- **Energy purchasing and demand management**
  In some plausible futures, federated smart home systems could allow residents (or resident cooperatives) to participate in collective energy purchasing, coordinated load shifting, or flexible demand response.[34] These approaches might reduce peak electricity usage, lower costs, and reduce strain on local infrastructure. However, their viability will depend on evolving market structures, regulation, device interoperability, and resident trust—any of which could develop in different directions.
- **Smart home monitoring and resident protection**
  Some futures may see optional, privacy-preserving in-home sensing support improved safety and wellbeing—ranging from environmental monitoring (air quality, humidity, temperature) to safety detection (falls, smoke, unusual inactivity) and limited health monitoring (patterns that may indicate risk). Adoption is likely to be uneven and culturally sensitive. The section should therefore frame these capabilities as possibilities that may emerge, alongside risks such as overreach, surveillance concerns, misuse, and cybersecurity exposure.
- **Integration with wider city systems**
  It is possible that future city systems—particularly energy systems—will increasingly expose interfaces for demand response, dynamic tariffs, and resilience measures (e.g., islanding modes, local constraints). Federated smart home systems could integrate with these city interfaces, but only if designed around open standards and clear governance. This section should explore what "good" integration might look like, without committing to a specific platform.[36][37]

How Forest City should respond

Forest City is unlikely to build federated smart home platforms itself. The key decision is therefore what minimum enabling conditions the city **should** create so that residents, landlords, innovators, and service providers can adopt mature systems later without costly or disruptive retrofits. This can be framed as a set of practical recommendations:

1. **Provide clean, open interface points at the city layer**
   City-managed systems (especially energy-related systems) should expose well-defined, standards-based interfaces that future smart home/federation platforms **could** connect to—covering areas such as tariff signals, demand response events, local capacity constraints, and (where appropriate) aggregated reporting. These interfaces should be designed to avoid lock-in, minimise data collection, and support multiple competing ecosystems.
2. **Design in physical "sensor readiness" as a low-regret provision**
   The built environment should make future sensing and device deployment straightforward. This **could** be as simple as:
   - providing ducting/conduit routes that reach key rooms and likely sensor locations
   - ensuring convenient power availability for low-voltage devices (or clear upgrade paths)
   - making maintenance/retrofit access non-disruptive (service voids, accessible risers, sensible mounting options)
   - documenting "as-built" routes so that future installations do not require exploratory work
     The intent is not to overfit to today's devices, but to make unknown future devices easy to

deploy safely and neatly.

3. **Prefer interoperability-friendly choices in any baseline provision**
   Where Forest City or its delivery partners provide baseline smart-home-adjacent infrastructure (e.g., metering, building management in multi-unit buildings, shared sensors), selection criteria should explicitly include interoperability, exportable data, and the ability to integrate with multiple third-party systems. This should reduce the risk that early choices create a long-term constraint.
4. **Support emerging standards and open ecosystems without owning them**
   Forest City should treat certain standards and open-source reference implementations as strategic enablers—tracking them, engaging early, and using procurement and partnership approaches that make adoption easier. This might include relationships with suppliers who demonstrate credible standards alignment, participation in relevant industry groups, and a bias toward widely used open formats and protocols.
5. **Make governance, privacy, and security "design inputs", not afterthoughts**
   Because trust is likely to determine whether federated smart home systems are adopted at all, Forest City should treat privacy-by-design patterns, consent models, and cybersecurity expectations as core requirements for any city interface and any baseline provision. The goal is to enable beneficial futures while avoiding a brittle or surveillance-prone outcome.

Summary recommendation: Forest City should not attempt to predict or build "the" federated smart home system. Instead, it should design-in optionality through open city-level interfaces, sensor-ready physical infrastructure, and interoperability-friendly procurement—while actively supporting emerging open standards so that future adoption can be low-friction, competitive, and trusted.

Appendices

Sources and further reading

1. Energy

[1] UK Power Networks Open Data. *NODD (refine.gsp=BURWELL)*. https://ukpowernetworks.opendatasoft.com/pages/nodd/?refine.gsp=BURWELL
[2] IET (2022). *Electricity transmission costing study* (PDF). https://www.theiet.org/media/9376/electricity-transmission-costing-study.pdf
[3] National Grid Electricity Transmission. *How much will it cost?* https://www.nationalgrid.com/electricity-transmission/how-to-get-connected/researching-your-connection/how-much-will-it-cost
[4] Ofgem. *Average gas and electricity use explained*. https://www.ofgem.gov.uk/average-gas-and-electricity-use-explained
[5] UK Government (2025-06-10). *Rolls-Royce SMR selected to build small modular nuclear reactors*. GOV.UK. https://www.gov.uk/government/news/rolls-royce-smr-selected-to-build-small-modular-nuclear-reactors
[6] IEA. *Electrolysers*. https://www.iea.org/energy-system/low-emission-fuels/electrolysers
[7] European Parliament (2025). *Flexibility and electrification: the role of electrolysers in the power system* (PDF). https://www.europarl.europa.eu/RegData/etudes/STUD/2025/769347/ECTI_STU%282025%29769347_EN.pdf
[8] UK Power Networks (2024-11-19). *EDS 08-2101: LV Customer Supplies Up To 100A* (PDF). https://media.umbraco.io/uk-power-networks/qknhfer1/eds-08-2101-lv-customer-supplies-up-to-100a.pdf
[9] DESNZ (2023-11-03). *Thousands of homes to be kept warm by waste heat from computer data centres in UK first*. GOV.UK. https://www.gov.uk/government/news/thousands-of-homes-to-be-kept-warm-by-waste-heat-from-computer-data-centres-in-uk-first
[10] IRENA. *Waste heat recovery from data centres* (Innovation landscape). https://www.irena.org/Innovation-landscape-for-smart-electrification/Power-to-heat-and-cooling/31-Waste-heat-recovery-from-data-centres

[11] BBC News. *Earth's heat to power 10,000 homes in renewable energy first for UK*. https://www.bbc.co.uk/news/articles/cewzg77k721o

2. Building technology

[12] KPMG (2023). *Smart Construction: How offsite manufacturing can transform UK construction*. https://kpmg.com/uk/en/home/insights/2023/06/smart-construction.html
[13] McKinsey & Company (2019). *Modular construction: From projects to products*. https://www.mckinsey.com/capabilities/operations/our-insights/modular-construction-from-projects-to-products
[14] UK Government (2025). *Timber in construction roadmap 2025*. https://www.gov.uk/government/publications/timber-in-construction-roadmap-2025
[15] Sweco. *Mjøstårnet – the world's tallest timber building* (project page). https://www.sweco.co.uk/projects/mjostarnet/

3. Data networking

[16] Reuters (2022-07-11). *Zayo launches subsea cable route connecting Britain and Europe*. https://www.reuters.com/business/media-telecom/zayo-launches-subsea-cable-route-connecting-britain-europe-2022-07-11/
[17] Light Blue Fibre. *Our assets*. https://www.lightbluefibre.co.uk/about-us/our-assets/
[18] Greater Cambridge Partnership. *Fibre ducting helps bring faster internet access for Greater Cambridge communities*. https://www.greatercambridge.org.uk/news/fibre-ducting-helps-to-bring-faster-internet-access-for-greater-cambridge-communities
[19] University of Cambridge (2022). *University launches fibre network joint venture with Cambridgeshire Council*. https://www.cam.ac.uk/news/university-launches-fibre-network-joint-venture-with-cambridgeshire-council
[20] Connecting Cambridgeshire (2024-10-16). *Dig Once policy delivers carbon savings and improved connectivity across Cambridgeshire*. https://www.connectingcambridgeshire.co.uk/2024/10/16/dig-once-policy-delivers-carbon-savings-and-improved-connectivity-across-cambridgeshire/
[21] Royal Docks (2022). *Royal Docks Digital Connectivity Study: Executive Report* (PDF). https://royaldocks.london/media/Royal-Docks-Digital-Connectivity-Study-2022.pdf
[22] Stokab. *In English* (mission/coverage). https://stokab.se/In-english/
[23] IFC (2023). *Municipal Broadband Networks: A Practical Guide to Getting Started* (PDF). https://www.ifc.org/content/dam/ifc/doc/mgrt/em-compass-note-107-municipal-broadband-networks-for-web.pdf
[24] UK Government (2022). *Approved Document R, Volume 1: Physical infrastructure and network connection for new dwellings* (PDF). https://assets.publishing.service.gov.uk/media/637f356ee90e072342b82d4e/ADR1.pdf
[25] GOV.UK. *New build connectivity: information for developers*. https://www.gov.uk/guidance/new-build-connectivity-information-for-developers
[26] Openreach (2024-08). *New Sites Fibre Handbook* (PDF). https://www.openreach.com/content/dam/openreach/openreach-dam-files/new-dam-%28not-in-use-yet%29/documents/help-support/New-Sites-Fibre-Handbook-August-2024-online.pdf

4. Digital twins and the Open Source City

[27] buildingSMART & OGC (2024). *BIM–GIS Strategic Roadmap* (PDF). https://www.buildingsmart.org/wp-content/uploads/2024/05/bSI-OGC-BIM-GIS-Strategic-Roadmap_Industry_Insight_bSI_v2.pdf
[28] QGIS. *Working with point clouds* (docs). https://docs.qgis.org/latest/en/docs/user_manual/working_with_point_clouds/point_clouds.html
[29] GOV.UK. *National Underground Asset Register (NUAR)*. https://www.gov.uk/guidance/national-

underground-asset-register-nuar
[30] Open Geospatial Consortium (OGC) (2021). *OGC CityGML 3.0 Conceptual Model Standard* (spec). https://docs.ogc.org/is/20-010/20-010.html
[31] OGC. *CityJSON*. https://www.ogc.org/standards/cityjson/
[32] buildingSMART. *Industry Foundation Classes (IFC)*. https://www.buildingsmart.org/standards/bsi-standards/industry-foundation-classes/
[33] Open Geospatial Consortium (OGC). *CityGML*. https://www.ogc.org/standards/citygml/

5. Federated smart home technology

[34] Energy Saving Trust (2025-08-21). *Demand Flexibility Service: get rewards for using less energy*. https://energysavingtrust.org.uk/demand-flexibility-service/
[35] Connectivity Standards Alliance. *Matter*. https://csa-iot.org/all-solutions/matter/
[36] OpenADR Alliance. *OpenADR*. https://www.openadr.org/